


□ BELO_GI_37/80 SUSPENDED



ARCHILIGHT

37



80

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered dimmable (touch, Dim, DALI)

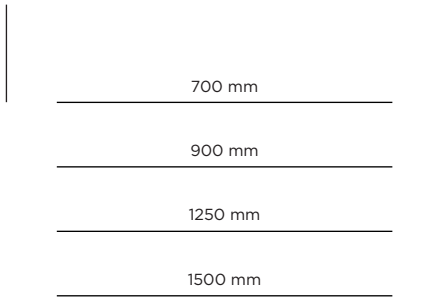

COLOR TEMPERATURE

3000K /3K
4000K /4K


OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

Delivered incl. 2m self locking suspensions




DIRECT CODE	Ø (mm)	W	Lm (light source) 3000K/4000K
SBS/37/GI700	700	56	8260/8050
SBS/37/GI900	900	72	10620/10350
SBS/37/GI1250	1250	104	15340/14950
SBS/37/GI1500	1500	128	18880/18400

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES



SPPKBS3075 (3X0,75)
SPPKBS5075 (5X0,75)
TRANSPARENT CABLE 2 METRES WITH CEILING BOX

