


□ BELO_LO_PO_80 SUSPENDED



ARCHILIGHT

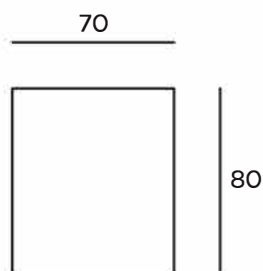

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block

Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical,

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

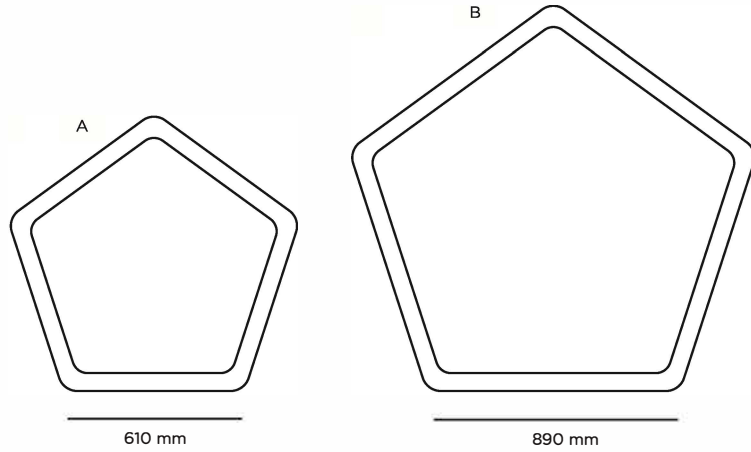

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/PO/A	610x80	41	6700/7100
SBS/80/PO/B	890x80	62	10050/10650


DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/PO/A/DI	610x80	41	6700/7100
SBS/80/PO/B/DI	890x80	62	10050/10650

COLOR TEMPERATURE	
3000K	/3K
4000K	/4K

OPTIC	
PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS	
DALI, TOUCHDIM	/DALI
WIRELESS	/WRS

Delivered incl. 2 m self-locking suspensions



Bronze color

COLORS		
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX