

□ BELO_LO_S_80 SUSPENDED



ARCHILIGHT

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

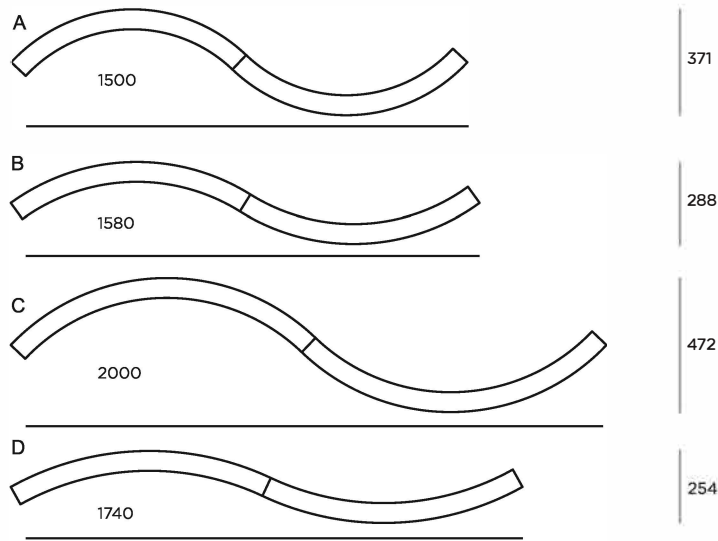

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/SA	1500x70x80 (D=1200)	26	4020/4260
SBS/80/LO/SB	1580x70x80 (D=1500)	26	4020/4260
SBS/80/LO/SC	2000x70x80 (D=1500)	33	5360/5680
SBS/80/LO/SD	1740x70x80 (D=2000)	26	4020/4260

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/SA/DI	1500x70x80 (D=1200)	26	4020/4260
SBS/80/LO/SB/DI	1580x70x80 (D=1500)	26	4020/4260
SBS/80/LO/SC/DI	2000x70x80 (D=1500)	33	5360/5680
SBS/80/LO/SD/DI	1740x70x80 (D=2000)	26	4020/4260

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

80 SPPKBO3075 (3X0,75)
 SPPKBO5075 (5X0,75)
 125 TRANSPARENT CABLE 2 METRES WITH CEILING BOX

70 80 SBSLOPKK END CAP 2PCS

Delivered incl. 2 m self-locking suspensions

