


□ BELO_LO SUSPENDED, CEILING, RECESSED



ARCHILIGHT

INSTALLATION
suspended, ceiling or recessed

CONNECTION
Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL
The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE
LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K


DIFFUSER
PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION
Direct symmetrical

EMERGENCY LIGHTING
A unit with integrated emergency is an option

DIMMING
All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

□ BELO_LO SUSPENDED, CEILING, RECESSED

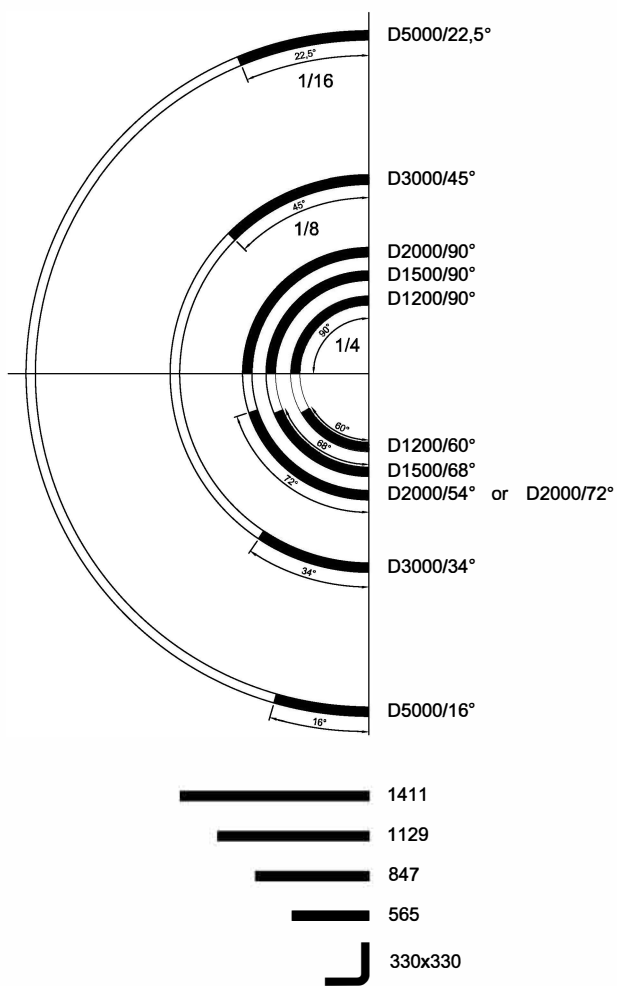

CODE SUSPENDED	CODE CEILING	CODE RECESSED	W	Lm from 3000K/4000K
SBS/LO/5000/22,5°	SBC/LO/5000/22,5°	SBV/LO/5000/22,5°	14	2170 / 2310
SBS/LO/3000/45°	SBC/LO/3000/45°	SBV/LO/3000/45°	16	2480 / 2640
SBS/LO/2000/90°	SBC/LO/2000/90°	SBV/LO/2000/90°	20	3100 / 3300
SBS/LO/1500/90	SBC/LO/1500/90	SBV/LO/1500/90	16	2480 / 2640
SBS/LO/1200/90°	SBC/LO/1200/90°	SBV/LO/1200/90°	12	1860 / 1980
SBS/LO/1200/60°	SBC/LO/1200/60°	SBV/LO/1200/60°	8	1240 / 1320
SBS/LO/1500/68°	SBC/LO/1500/68°	SBV/LO/1500/68°	12	1860 / 1980
SBS/LO/2000/54°	SBC/LO/2000/54°	SBV/LO/2000/54°	12	1860 / 1980
SBS/LO/2000/72°	SBC/LO/2000/72°	SBV/LO/2000/72°	16	2480 / 2640
SBS/LO/3000/34°	SBC/LO/3000/34°	SBV/LO/3000/34°	12	1860 / 1980
SBS/LO/5000/16°	SBC/LO/5000/16°	SBV/LO/5000/16°	10	1550 / 1650
SBS/LO/0000/1411	SBC/LO/0000/1411	SBV/LO/0000/1411	20	3100 / 3300
SBS/LO/0000/1129	SBC/LO/0000/1129	SBV/LO/0000/1129	16	2480 / 2640
SBS/LO/0000/847	SBC/LO/0000/847	SBV/LO/0000/847	12	1860 / 1980
SBS/LO/0000/847	SBC/LO/0000/847	SBV/LO/0000/847	8	1240 / 1320
SBS/LO/0000/90°	SBC/LO/0000/90°	SBV/LO/0000/90°	8	1240 / 1320

ARCHILIGHT

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

COLOR TEMPERATURE

3000K	/3K
4000K	/4K


OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI
WIRELESS	/WRS

SUSPENDED, CEILING, RECESSED



ACCESSORIES

70



80
SBLOPKK
END CAP
2PCS



80



SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX

50



45
SPSP2
DIRECT CONNECTION 2 PCS

70



80

RECESSED



ACCESSORIES

70



80
SBLOPKK
END CAP
2PCS



80




SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX

50



45
SPSP2
DIRECT CONNECTION 2 PCS

70



90

80



73 mm