


□ CUBUS SUSPENDED, CEILING, WALL, RECESSED



INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY CUBUS SYSTEM


1. SUSPENDED / CEILING / RECESSED

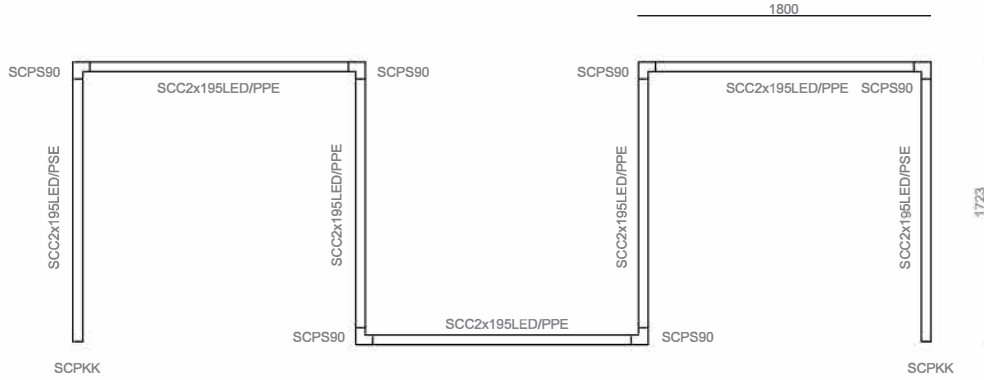


2. SUSPENDED / CEILING / RECESSED

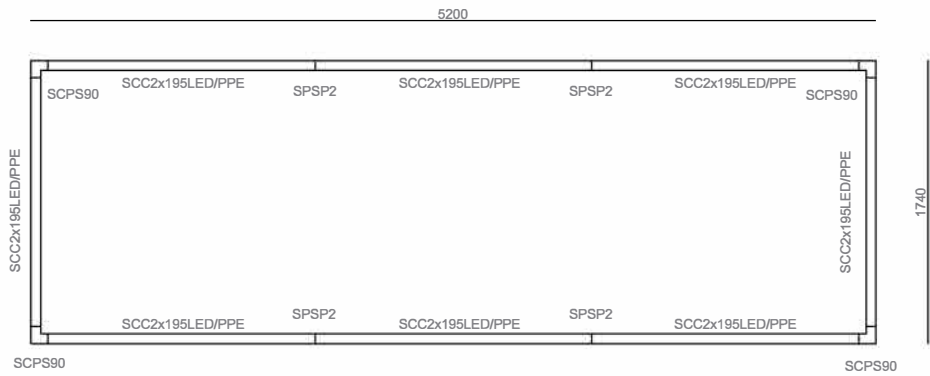

3. SUSPENDED / CEILING / WALL / RECESSED




4. SUSPENDED / CEILING / RECESSED

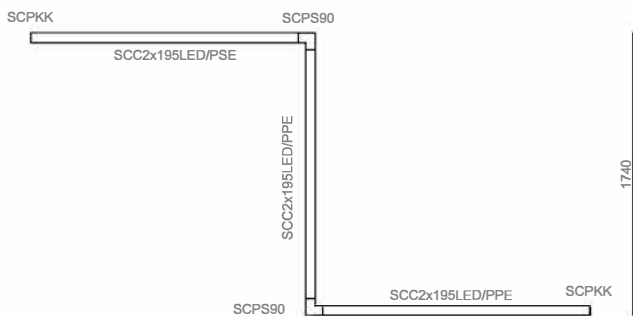





□ CUBUS

SUSPENDED, CEILING, WALL



CODE SUSPENDED	CODE CEILING	CODE WALL	L (mm)	W	Lm from 3000K/4000K
SCS130PSE	SCC130PSE	SCW130PSE	595x60x62	9	1340/1420
SCS250PSE	SCC250PSE	SCW250PSE	595x60x62	13	1860/1960
SCS195PSE	SCC195PSE	SCW195PSE	850x60x62	13	2010/2130
SCS375PSE	SCC375PSE	SCW375PSE	850x60x62	19	2790/2940
SCS260PSE	SCC260PSE	SCW260PSE	1135x60x62	17	2680/2840
SCS500PSE	SCC500PSE	SCW500PSE	1135x60x62	25	3720/3920
SCS325PSE	SCC325PSE	SCW325PSE	1415x60x62	21	3350/3550
SCS625PSE	SCC625PSE	SCW625PSE	1415x60x62	31	4650/4900
SCS2x195PSE	SCC2x195PSE	SCW2x195PSE	1700x60x62	26	4020/4260
SCS2x375PSE	SCC2x375PSE	SCW2x375PSE	1700x60x62	37	5580/5880
SCS2x230PSE	SCC2x230PSE	SCW2x230PSE	1980x60x62	29	4690/4970
SCS2x440PSE	SCC2x440PSE	SCW2x440PSE	1980x60x62	43	6510/6860
SCS2x260PSE	SCC2x260PSE	SCW2x260PSE	2265x60x62	33	5360/5680
SCS2x500PSE	SCC2x500PSE	SCW2x500PSE	2265x60x62	49	7440/7840
SCS2x325PSE	SCC2x325PSE	SCW2x325PSE	2825x60x62	41	6700/7100
SCS2x625PSE	SCC2x625PSE	SCW2x625PSE	2825x60x62	61	9300/9800

ACCESSORIES



RECESSED





CODE	L (mm)	W	Lm from 3000K/4000K
SCV130PSE	595x70x85	9	1340/1420
SCV250PSE	595x70x85	13	1860/1960
SCV195PSE	850x70x85	13	2010/2130
SCV375PSE	850x70x85	19	2790/2940
SCV260PSE	1135x70x85	17	2680/2840
SCV500PSE	1135x70x85	25	3720/3920
SCV325PSE	1415x70x85	21	3350/3550
SCV625PSE	1415x70x85	31	4650/4900
SCV2x195PSE	1700x70x85	26	4020/4260
SCV2x375PSE	1700x70x85	37	5580/5880
SCV2x230PSE	1980x70x85	29	4690/4970
SCV2x440PSE	1980x70x85	43	6510/6860
SCV2x260PSE	2265x70x85	33	5360/5680
SCV2x500PSE	2265x70x85	49	7440/7840
SCV2x325PSE	2825x70x85	41	6700/7100
SCV2x625PSE	2825x70x85	61	9300/9800



63 mm

ACCESSORIES



COLOR TEMPERATURE

3000K /3K
4000K /4K








OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

LENGTH of modules for assembly when delivered with SCPS90

- 55 mm (for 1 pc SCSP9090) /L1
- 85 mm (for 1 pc SCSP9090) /L2
- 140 mm (for 2 pcs SCSP9090) /L3

