


□ DUAL SUSPENDED, CEILING, WALL



ARCHILIGHT

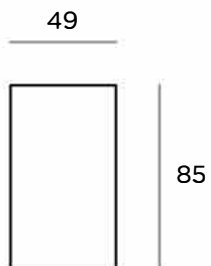

INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY DUAL SYSTEM


1. SUSPENDED / CEILING

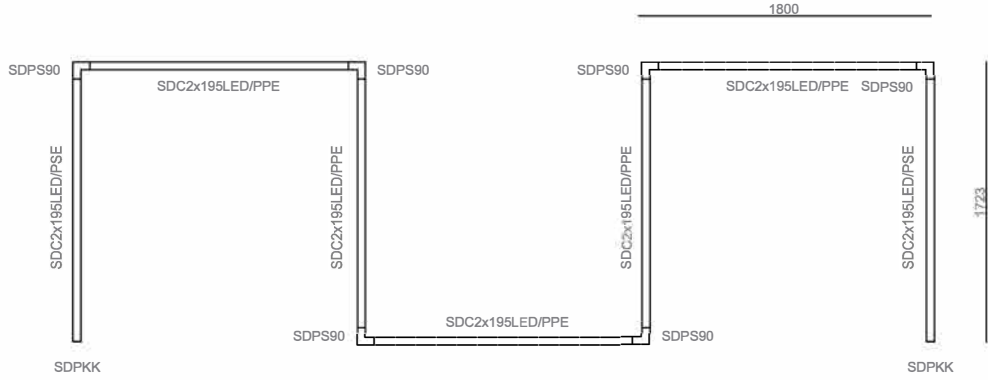


2. SUSPENDED / CEILING

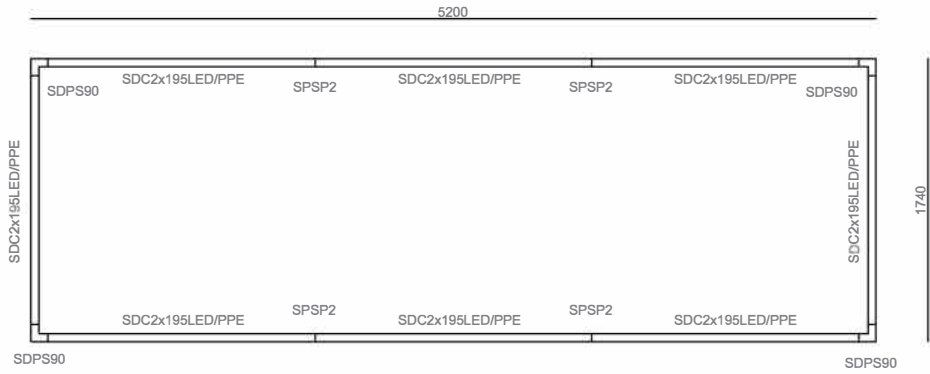

3. SUSPENDED / CEILING / WALL



4. SUSPENDED / CEILING

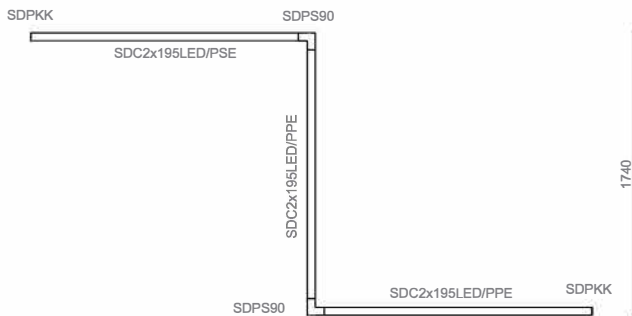

□ DUAL SUSPENDED, CEILING, WALL


CODE DIRECT SUSPENDED	CODE DIRECT CEILING	CODE DIRECT WALL	L (mm)	W	Lm from 3000K/4000K
SDS130PSE	SDC130PSE	SDW130PSE	595xS49x85	8	1340/1420
SDS250PSE	SDC250PSE	SDW250PSE	595xS49x85	12	1860/1960
SDS195PSE	SDC195PSE	SDW195PSE	850xS49x85	12	2010/2130
SDS375PSE	SDC375PSE	SDW375PSE	850xS49x85	18	2790/2940
SDS260PSE	SDC260PSE	SDW260PSE	1135xS49x85	16	2680/2840
SDS500PSE	SDC500PSE	SDW500PSE	1135xS49x85	24	3720/3920
SDS325PSE	SDC325PSE	SDW325PSE	1415xS49x85	21	3350/3550
SDS625PSE	SDC625PSE	SDW625PSE	1415xS49x85	31	4650/4900
SDS2x195PSE	SDC2x195PSE	SDW2x195PSE	1700xS49x85	26	4020/4260
SDS2x375PSE	SDC2x375PSE	SDW2x375PSE	1700xS49x85	37	5580/5880
SDS2x230PSE	SDC2x230PSE	SDW2x230PSE	1980xS49x85	29	4690/4970
SDS2x440PSE	SDC2x440PSE	SDW2x440PSE	1980xS49x85	43	6510/6860
SDS2x260PSE	SDC2x260PSE	SDW2x260PSE	2265xS49x85	33	5360/5680
SDS2x500PSE	SDC2x500PSE	SDW2x500PSE	2265xS49x85	49	7440/7840
SDS2x325PSE	SDC2x325PSE	SDW2x325PSE	2825xS49x85	41	6700/7100
SDS2x625PSE	SDC2x625PSE	SDW2x625PSE	2825xS49x85	61	9300/9800

CODE DIRECT / INDIRECT SUSPENDED	ODE DIRECT / INDIRECT CEILING	ODE DIRECT / INDIRECT WALL	L (mm)	W	Lm from 3000K/4000K
SDS130PSE/DI	---	SDW130PSE/DI	595xS49x85	2x8	2x1340/2x1420
SDS250PSE/DI	---	SDW250PSE/DI	595xS49x85	2x12	2x1860/2x1960
SDS195PSE/DI	---	SDW195PSE/DI	850xS49x85	2x12	2x2010/2x2130
SDS375PSE/DI	---	SDW375PSE/DI	850xS49x85	2x18	2x2790/2x2940
SDS260PSE/DI	---	SDW260PSE/DI	1135xS49x85	2x16	2x2680/2x2840
SDS500PSE/DI	---	SDW500PSE/DI	1135xS49x85	2x24	2x3720/2x3920
SDS325PSE/DI	---	SDW325PSE/DI	1415xS49x85	2x21	2x3350/2x3550
SDS625PSE/DI	---	SDW625PSE/DI	1415xS49x85	2x31	2x4650/2x4900
SDS2x195PSE/DI	---	SDW2x195PSE/DI	1700xS49x85	2x26	2x4020/2x4260
SDS2x375PSE/DI	---	SDW2x375PSE/DI	1700xS49x85	2x37	2x5580/2x5880
SDS2x230PSE/DI	---	SDW2x230PSE/DI	1980xS49x85	2x29	2x4690/2x4970
SDS2x440PSE/DI	---	SDW2x440PSE/DI	1980xS49x85	2x43	2x6510/2x6860
SDS2x260PSE/DI	---	SDW2x260PSE/DI	2265xS49x85	2x33	2x5360/2x5680
SDS2x500PSE/DI	---	SDW2x500PSE/DI	2265xS49x85	2x49	2x7440/2x7840
SDS2x325PSE/DI	---	SDW2x325PSE/DI	2825xS49x85	2x41	2x6700/2x7100
SDS2x625PSE/DI	---	SDW2x625PSE/DI	2825xS49x85	2x61	2x9300/2x9800



LENGTH of modules for assembly when delivered with SDPS90

- 55 mm (for 1 pc SCSP9090) /L1
- 85 mm (for 1 pc SCSP9090) /L2
- 140 mm (for 2 pcs SCSP9090) /L3

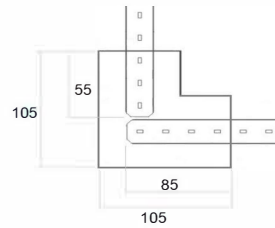

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

49



85 SDPKK
END CAP
2PCS



75



75 SPPKB03075 (3X0,75)
SPPKB05075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX



25

50



45 SPSP2
DIRECT CONNECTION 2 PCS



105



105 49 SDPS90
90° COUPLER

49